

Level instruments

Point level measurement - Capacitance switches

Pointek CLS100

Overview



Pointek CLS100 is a compact 2-wire inverse frequency shift capacitance switch for level detection in constricted spaces, interfaces, solids, liquids, slurries and foam.

Benefits

- Easy installation with verification by built-in LED
- Low maintenance with no moving parts
- Sensitivity adjustment
- Integrated cable or PBT enclosure versions available
- Intrinsically Safe, Dust Ignition Proof and General Purpose options available

Application

Pointek CLS100's short insertion length of 100 mm (4") and versatility in various applications and in vessels or pipes makes it a good replacement for traditional capacitance sensors.

Its advanced tip-sensing technology provides accurate, repeatable switchpoint performance. The PPS (Polyphenylene sulfide) probe [optional PVDF (Polyvinylidene Fluoride)] is chemically resistant with an effective process operating temperature range from -30 to +100 °C (-22 to +212 °F) (7ML5501), and -10 to +100 °C (+14 to +212 °F) (7ML5610). The fully potted design ensures reliability in a vibrating environment such as agitated tanks up to 4 g. When used with a SensGuard protection cover, the CLS100 is protected from shearing, impact and abrasion in tough primary processes.


The Pointek CLS100 is available in three versions. The integral cable version has a stainless steel process connection and probe options of PPS or PVDF. The fully synthetic version has a thermoplastic polyester enclosure with a PPS process connection combined with a PPS probe. The standard enclosure version has a thermoplastic polyester enclosure with a stainless steel process connection in combination with a PPS or PVDF probe.

- Key Applications: liquids, slurries, powders, granules, food and pharmaceuticals, chemicals, hazardous areas


Configuration

Installation

Standpipes

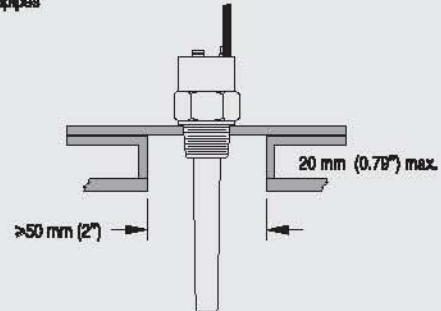

Wall Restriction

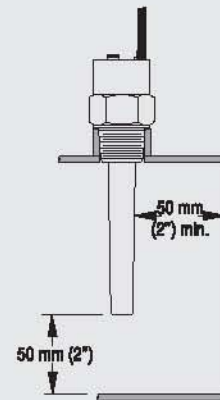

Pointek CLS100 installation

Level instruments

Point level measurement - Capacitance switches

Pointek CLS100

Technical specifications

	Stainless steel process connection (integral cable or enclosure version) (7ML5501)	Fully synthetic process connection (enclosure version only) (7ML5610)
Mode of operation		
Measuring principle	Inverse frequency shift capacitive level detection	Inverse frequency shift capacitive level detection
Input		
Measured variable	Change in picroFarad (pF)	Change in picroFarad (pF)
Output		
Output signal		
• Alarm output	4 or 20/20 or 4 mA 2-wire loop	4 or 20/20 or 4 mA 2-wire loop
• Switch output ¹⁾	Solid-state: 30 V DC/30 V AC, max. 82 mA	Max. switching voltage: 60 V DC/30 V AC Max. switching current: 1 A
• Fail-safe mode	Min. or max.	Min. or max.
Accuracy		
Repeatability	2 mm (0.08")	2 mm (0.08")
Rated operating conditions²⁾		
<u>Installation conditions</u>		
• Location	Indoor/outdoor	Indoor/outdoor
<u>Ambient conditions</u>		
• Ambient temperature	-30 to +85 °C (-22 to +185 °F)	-10 to +85 °C (+14 to +185 °F)
• Installation category	I	I
• Pollution degree	4	4
<u>Medium conditions</u>		
• Relative dielectric constant ϵ_r	Min. 1.5	Min. 1.5
• Process temperature	-30 to +100 °C (-22 to +212 °F)	-10 to +100 °C (+14 to +212 °F)
• Pressure (vessel)	-1 to +10 bar g (-14.6 to +146 psi g), nominal ²⁾	-1 to +10 bar g (-14.6 to +146 psi g), nominal
• Degree of protection		
- Enclosure version	IP68/Type 4/NEMA 4	IP68/Type 4/NEMA 4
- Integral cable version	IP65/Type 4/NEMA 4	Not applicable
• Cable inlet	½" NPT (M20x1.5 optional)	½" NPT (M20x1.5 optional)
Design		
	Enclosure/ Integral cable version	Fully synthetic version
• Material		
- Body (Enclosure version)	Thermoplastic polyester	Thermoplastic polyester
- Lid (Enclosure version)	Transparent thermoplastic polycarbonate (PC)	Transparent thermoplastic polycarbonate (PC)
- Integrated cable body (Integral cable version)	316L stainless steel	Not applicable

	Stainless steel process connection (integral cable or enclosure version) (7ML5501)	Fully synthetic process connection (enclosure version only) (7ML5610)
• Sensor length (nominal)	100 mm (4")	100 mm (4")
• Process connection material of probe/wetted parts	Connection: 316L stainless steel; Process seal: FKM (optional FFKM); Sensor: PPS (optional PVDF) ³⁾	PPS process connection and PPS sensor (Uni-Construction)
• Connection (Enclosure version)	Internal 5-point terminal block, ½" NPT wiring entrance, M20x1.5 optional	Removable internal 5-point terminal block, ½" NPT wiring entrance, M20 x 1.5 optional
• Connection (Integral cable version)	4 conductors, 1 m (3.3 ft), 0.5 mm² (22 AWG), shielded, polyester jacket	Not applicable
• Process connection	¾" NPT [(Taper), ANSI/ASME B1.20.1] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	¾" NPT [(Taper), ANSI/ASME B1.20.1] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]
Power supply		
• Standard	12 to 33 V DC	12 to 33 V DC
• Intrinsically Safe	10 to 30 V DC (Intrinsically Safe barrier required)	Not applicable
Certificates and approvals	• General: CE, CSA, FM, C-TICK • Marine: Lloyds Register of Shipping, categories ENV1, ENV2, and ENV5 • Dust Ignition Proof (barrier required): CSA/FM Class II and III, Div. 1, Groups E, F, G T4 • Intrinsically Safe (barrier required): CSA/FM Class I, II and III, Div. 1, Groups A, B, C, D, E, F, G T4 • ATEX II 1 GD 1/2GD EEx ia IIC T4 to T6 T107 °C • Overfill protection: WHG (Germany)	• General: CSA, FM

- 1) When synthetic process connection version (7ML5610) is used in wet locations, switching voltage of the relay is limited to 35 V DC/16 V AC.
- 2) When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/13.
- 3) When FFKM O-ring (Option A22) is selected, process temperature is restricted to -20 °C (-4 °F).

5

Pointek CLS100

Selection and Ordering data

Pointek CLS100, stainless steel process connection

Compact 2-wire inverse frequency shift capacitance switch for level detection in constricted spaces, interfaces, solids, liquids, slurries and foam

Process connection

¾" NPT [(Taper), ANSI/ASME B1.20.1]
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]

Approvals

General Purpose: CE, CSA, FM, C-TICK
CSA/FM Class I, II and III, Div. 1, Groups A, B, C, D, E, F, G T4; ATEX II 1 GD 1/2GD EEx ia IIC T4 to T6 T107 °C¹⁾
CSA/FM Class II and III, Div. 1, Groups E, F, G¹⁾

Device version

Integral cable version (PPS probe)
Enclosure version (PPS probe), ½" NPT cable inlet
Integral cable version with PVDF probe body
Enclosure version with PVDF probe body (½" NPT cable inlet)
Enclosure version (PPS probe), M20x1.5 cable inlet
Enclosure version with PVDF probe body, M20x1.5 cable inlet

WHG approval, German overfill protection

Not required
Required

Further designs

Please add "-Z" to Order No. and specify Order code(s).

Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75")]: Measuring-point number/identification (max. 20 characters) specify in plain text

FFKM seal O-ring²⁾

Inspection Certificate Type 3.1 per EN 10204

Operating Instructions

Quick start manual, multi-language
Note: due to ATEX regulations one Quick start manual is included with every product.
This device is shipped with the Siemens Milltronics manual CD containing ATEX Quick Starts and Operating Instructions.

Optional equipment

Sensguard, ¾" NPT (PPS)
Only available for CLS100 with ¾" NPT thread
Sensguard, R 1" (BSPT) (PPS)
Only available for CLS100 with ¾" NPT thread

Siemens Intrinsically Safe Barrier (DC powered), ATEX II 1 G EEx ia
½" NPT cable gland, nickel plated brass, fits cable diameter 6 to 12 mm (0.24 to 0.47")
-40 to +100 °C (-40 to +212 °F), IP68 (General Purpose)

M20x1.5 cable gland, PA polyamide, ATEX II 2G EEx e II, fits cable diameter 7 to 12 mm (0.28 to 0.47"), -20 to +70 °C (-4 to +158 °F), IP68 (General Purpose)

Order No.

7 M L 5 5 0 1 -

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

Selection and Ordering data

Pointek CLS100, PPS process connection

Compact 2-wire inverse frequency shift capacitance switch for level detection in constricted spaces, interfaces, solids, liquids, slurries and foam

Process connection (PPS)

¾" NPT [(Taper), ANSI/ASME B1.20.1]
(PPS probe body)
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]
(PPS probe body)

Approvals

General Purpose: CSA, FM

Versions/Options

Enclosure version, PPS process connection, ½" NPT cable inlet
Enclosure version, PPS process connection, M20x1.5

Further designs

Please add "-Z" to Order No. and specify Order code(s).

Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75")]: Measuring-point number/identification (max. 20 characters) specify in plain text

Operating Instructions

Quick start manual, multi-language
Note: one Quick start manual is included with every product
This device is shipped with the Siemens Milltronics manual CD containing ATEX Quick Starts and Operating Instructions.

Accessories

Sensguard, ¾" NPT (PPS)
Only available for CLS100 with ¾" NPT thread
Sensguard, R 1" (BSPT) (PPS)
Only available for CLS100 with ¾" NPT thread

Order No.

7 M L 5 6 1 0 -

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0


0

0

0

Options

Optional Sensguard

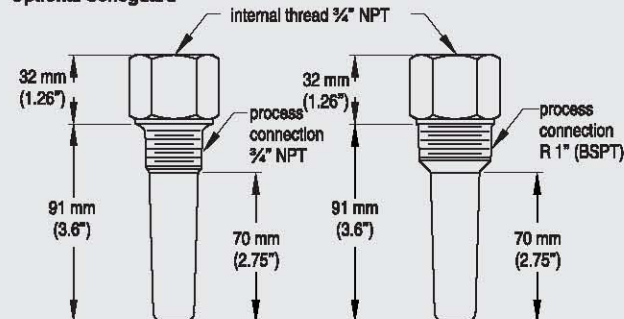


Optional Sensguard dimensions

¹⁾ Barrier or Intrinsically safe power supply required for Intrinsically Safe protection

²⁾ See Temperature restriction on page 5/13

C) Subject to export regulations AL: N, ECCN: EAR99

Characteristic curves

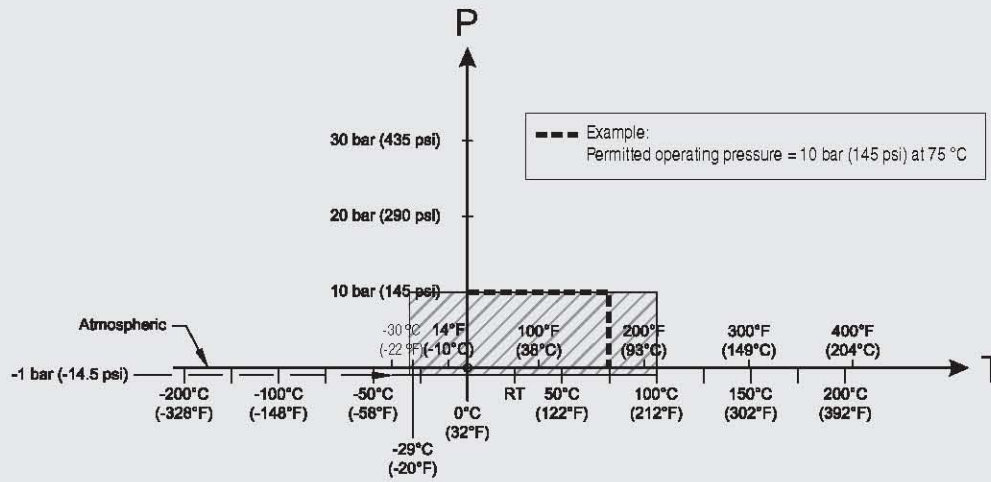


Pressure/Temperature Curve CLS100 (7ML5501) Threaded Process Connections

P = Permitted Operating Pressures
T = Permitted Operating Temperature


Pointek CLS100 Process Pressure/Temperature derating curves

Dimensional drawings

Integral Cable Version

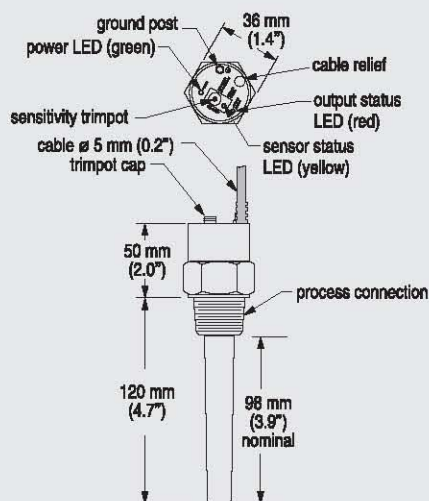

Enclosure Version

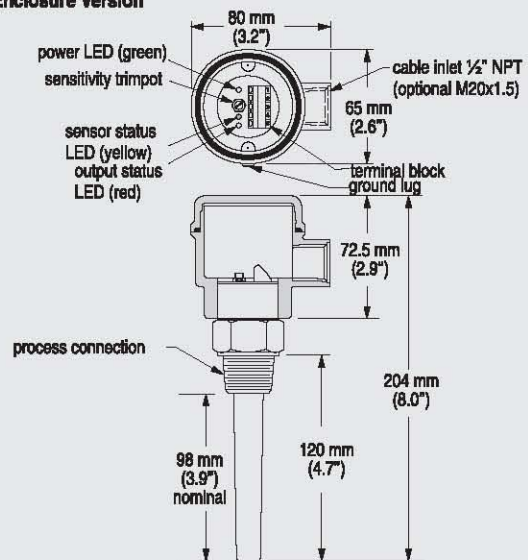


Pointek CLS100 dimensions


Schematics

Integral Cable Version - Non Intrinsically Safe only


LOW/HIGH Alarm




4 to 20 mA Loop Alarm

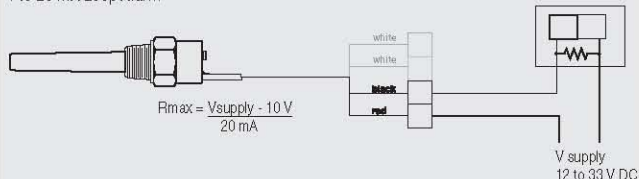

Solid State Switch Version

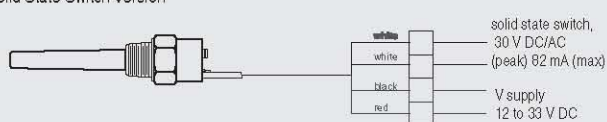

Enclosure and Fully Synthetic Version

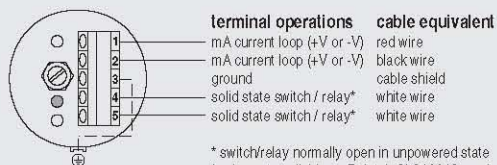

* switch/relay normally open in unpowered state
* relay not available on Pointek CLS100IS version (7ML5501)

Note:

When driving an inductive load (for example, an external relay), a protection diode must be connected in the correct polarity to prevent possible switch damage due to inductive spikes generated by switching the inductor (please refer to instruction manual).
Intrinsically Safe Models - please follow local regulations and area classifications; refer to instruction manual for more details.

Pointek CLS100 connections